




9000 Rotary Switches *2A 250Vac*



- ▶ Rotary action switch
- ▶ Ratings up to 2A, 250V ac
- ▶ 4 position, single pole
- ▶ 90° indexed positions






2A 250Vac T85

UL 2A 250Vac, 65°C, file E45221


RoHS compliant

9000 00 ---



TERMINAL	FUNCTION		BODY	OPTIONS
T	<p>9000</p> <div style="display: grid; grid-template-columns: 1fr 1fr;"> <div style="text-align: center;"> <p>1</p> </div> <div style="text-align: center;"> <p>2</p> <p>+</p> </div> <div style="text-align: center;"> <p>3</p> <p>A+</p> </div> <div style="text-align: center;"> <p>4</p> <p>A+</p> </div> </div>			<p>Rotation Stops</p>

Dimensions (.)

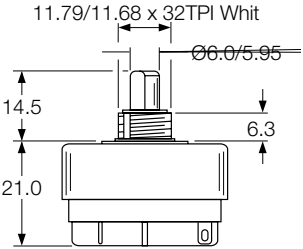

9100 Pull Cord Switches 16(4)A 250Vac



16(4)A 250Vac T125
16A 400Vac T125
8(8)A 250Vac T125 5E4 (50,000 Operations)



UL CSA 20A 277Vac, 250Vac 2hp, 125Vac 1hp
UL85°C, file no. E45221, CSA file no. LR10990

In house test

20A 28V dc

9100 pull cord switches have 45° indexing



RoHS compliant

3mm contact gap
Technical data on pages 4 & 5







- ▶ Pull cord operation
- ▶ Ratings up to 16A, 250V ac; 20A, 28V dc
- ▶ 2 & 4 way rotary switch
- ▶ Pairs of single pole change over contacts
- ▶ Wide choice of switching circuits



C9821PC ---


C 9 8 2 1 PC

TERMINAL SERIES PULL CORD POSITIONS CIRCUIT BODY

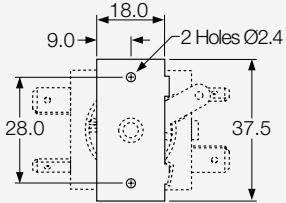
▶ TERMINAL	▶ SERIES	▶ FUNCTION	▶ BODY/MOUNTING
<p>C</p>  <p>6.3 x 0.8</p>	<p>98</p>	<p>2 Switching positions</p> <p>Off 1</p> 	<p>PC 2 hole fixing</p> 
<p>H</p>  <p>4.8 x 0.8</p> <p>For approval information on H terminals, contact the factory</p>		<p>2 Switching positions</p> <p>Off 1+3</p> 	
		<p>4 Switching positions</p> <p>Off 1+3, 2+4, 1+2+3+4</p> 	

Dimensions (mm)

9100PC (C terminals shown)

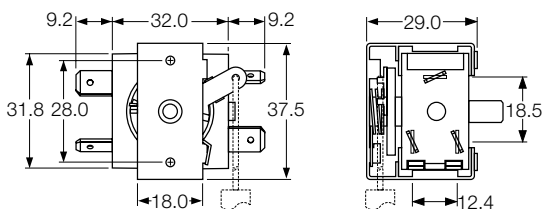

9100 Rotary Switches 16A 250Vac

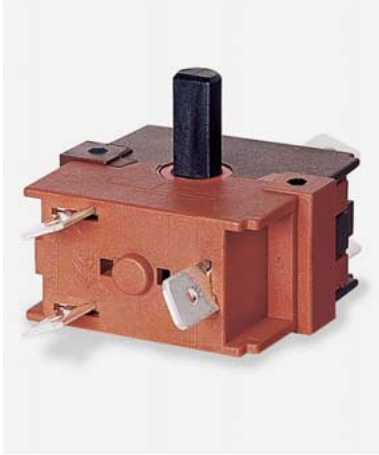

- ▶ 2 to 6 way rotary switch
- ▶ Ratings up to 16A, 250V ac; 20A, 28V dc
- ▶ Pairs of single pole change over contacts
- ▶ Wide choice of switching circuits
- ▶ Can be stacked together



16(4)A 250Vac T125
16A 400Vac T125



8(8)A 250Vac T125 5E4 (50,000 Operations)

UL CSA 20A Non Ind 277Vac, 250Vac 2hp, 125Vac 1hp
UL85°C, file no. E45221, CSA file no. LR10990

In house test

20A 28V dc



RoHS compliant

9100 switches are highly versatile with up to 6 positions at 30° intervals and 6 terminals per switch. For more complex switching (7 positions & over), contact the factory. Two switches may be stacked to give up to 12 terminal switching.


3mm contact gap.

Technical data on pages 4 & 5.







C 9 5 01 D A

TERMINAL SERIES POSITIONS CIRCUIT SPINDLE BODY







▶ TERMINAL	▶ SERIES	▶ POSITION	▶ CIRCUIT	▶ SPINDLE																					
<p>C</p> <p>6.3 x 0.8</p>	9	<p>2</p> <p>Switching positions</p>	<p>9100 switches offer almost infinite switching options</p> <p>For this reason it is impractical to show all the options available.</p> <p>The table below gives an example of a 5 position switching sequence: OFF, 1, 1+2, 1+2+3, 1+2+3+4</p> <table border="1"> <thead> <tr> <th></th> <th>Off</th> <th>Pos 1</th> <th>Pos 2</th> <th>Pos 3</th> <th>Pos 4</th> <th>Pos 5</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>B</td> <td></td> <td></td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> </tbody> </table>		Off	Pos 1	Pos 2	Pos 3	Pos 4	Pos 5	A	●	●	●	●	●	●	B			●	●	●	●	<p>A</p>
		Off		Pos 1	Pos 2	Pos 3	Pos 4	Pos 5																	
A		●		●	●	●	●	●																	
B					●	●	●	●																	
				<p>3</p> <p>Switching positions</p>	<p>B</p>																				
				<p>4</p> <p>Switching positions</p>	<p>C</p>																				
		<p>5</p> <p>Switching positions</p>	<p>D</p>																						
<p>H</p> <p>4.8 x 0.8</p> <p>For approval information on H terminals, contact the factory.</p> <p>Simple circuits may not use all terminals. Unnecessary terminals may be omitted.</p>		<p>6</p> <p>Switching positions</p>	<p>M</p>																						
			<p>The code for your chosen circuit will be allocated by our technicians. Please contact the factory for details.</p> <p>Use the blank table to plan your switching up to 6 positions.</p> <table border="1"> <thead> <tr> <th></th> <th>Pos 1</th> <th>Pos 2</th> <th>Pos 3</th> <th>Pos 4</th> <th>Pos 5</th> <th>Pos 6</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> <td>●</td> </tr> <tr> <td>B</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Pos 1	Pos 2	Pos 3	Pos 4	Pos 5	Pos 6	A	●	●	●	●	●	●	B							<p>N</p>
	Pos 1	Pos 2	Pos 3	Pos 4	Pos 5	Pos 6																			
A	●	●	●	●	●	●																			
B																									
				<p>P</p>																					
				<p>R</p> <p>for 2 gang switching</p>																					
				<p>S</p>																					
				<p>L</p> <p>supplied without spindle</p>																					








OFF, 1



OFF, 2+3, 2+3+4



OFF, 1, 2, 3



BODY

A

Standard 2 hole fixing

Recommended fixing

2 off No4 / 3.0mm self tapping screws
5.0mm min penetration into switch body.

Stacked Switches

For more complex switching a second switch may be stacked on the first.

OPTIONS

Anti-rotation stops

May be fitted at any of the index positions to limit the maximum angle of rotation.


Panel clearance

A spacer can be fitted to the switch body to increase the clearance between the mounting panel and switch terminals.

Custom spindles

Custom spindles of any length, with or without a "D"

DIMENSIONS (mm)



Spindle Movement 360° in 30° intervals

