

IEC Connectors & NEMA Receptacles



10A 250V ac



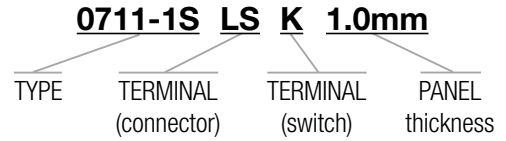
UL CSA 10A 250V ac UL 65°C



RoHS compliant

To order:
State type number, connector terminal code, switch terminal code (if applicable), and for snap-in items, the panel thickness. Stocked items are for 1.0mm panels.

- ▶ Ratings up to 10A, 250V ac
- ▶ IEC 320 Inlets & outlets
- ▶ NEMA outlets
- ▶ Fused and non fused
- ▶ Flange and snap to panel fixing



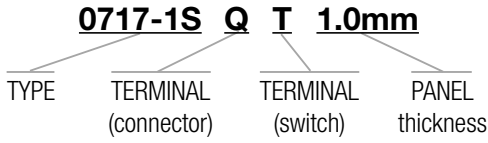
TYPE	TERMINAL	DIMENSIONS (mm)	View below is at Y
0707-1-C (2k min order) Inlet	S 2.5 Solder	<p>15A 250Vac 10A 250Vac</p>	
	N 4.0 Solder		
	Q 4.8 Tab		
	W 6.3 Tab		
0708-1-C Outlet	N 4.0 Solder	<p>15A 250Vac 10A 250Vac</p>	
	Q 4.8 Tab		
	W 6.3 Tab		
	P PCB		
0709-P Outlet	L 4.0 Solder	Panel X thickness 0.8 24.0 1.0 24.6 1.2 25.2 1.6 26.2 <p>15A 250Vac</p>	
	Q 4.8 Tab		
0710-P Outlet	V12 Solid Wire	Panel X thickness 0.8 - 1.2 24.6 1.3 - 2.0 24.8 	
	V16 Solid Wire		
0711-P (2k min order) Inlet	S 2.5 Solder	Rating/approval details on request Panel X thickness 0.8 - 1.2 20.3 1.3 - 2.0 20.5 <p>15A 250Vac 10A 250Vac</p>	
	N 4.0 Solder		
	Q 4.8 Tab		
	W 6.3 Tab		

IEC Connectors & NEMA Receptacles



- ▶ Ratings up to 10A, 250V ac
- ▶ IEC 320 Inlets & outlets
- ▶ Fused and non fused
- ▶ Flange and snap to panel fixing

10A 250V ac
UL CSA 10A 250V ac UL 65°C
RoHS compliant

To order:
 State type number, connector terminal code, switch terminal code (if applicable), and for snap-in items, the panel thickness. Stocked items are for 1.0mm panels.

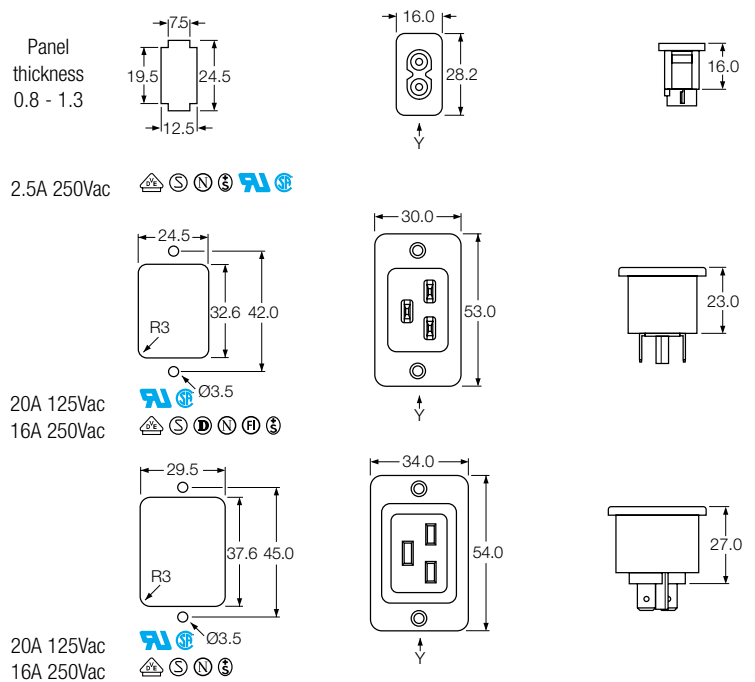


TYPE	TERMINAL	DIMENSIONS (mm)	View below is at Y
0717-1-P Fused Inlet 5x20	S 2.5 Solder	Panel X thickness 0.8 - 1.2 31.4 1.3 - 2.0 31.6	
	LS 2.8 Solder		
	Q 4.8 Tab		
	W 6.3 Tab		
10A 250Vac			
0717-1S State "Non Lit" Switched Fused Inlet 5x20	Q 4.8 Solder Connector	Panel thickness: 0.8 or 1.0 or 1.2 Call factory for details	
	T 4.8 Solder Switch		
10A 250Vac			
0717-1S State "Lit" Switched Fused Inlet 5x20	Q 4.8 Solder Connector	Panel thickness: 0.8 or 1.0 or 1.2 Call factory for details	
	T 4.8 Solder Switch		
10A 250Vac			
0717-C Fused Inlet 5x20	S 2.5 Solder	Panel X thickness 0.8 - 1.0 or 1.2 Call factory for details	
	LS 2.8 Solder		
	Q 4.8 Tab		
	W 6.3 Tab		
10A 250Vac			
0717-2-C (2k min order) Double Fused Inlet 5x20	S 2.5 Solder	Panel X thickness 0.8 - 1.0 or 1.2 Call factory for details	
	LS 2.8 Solder		
	Q 4.8 Tab		
	W 6.3 Tab		
10A 250Vac			
0717-2-C For applications (eg medical equipment) where both live & neutral feeds must be fused			
0717-2-P (2k min order) Double Fused Inlet 5x20	S 2.5 Solder	Panel thickness: 0.8 or 1.0 or 1.2 or 1.5 Call factory for details	
	LS 2.8 Solder		
	Q 4.8 Tab		
	W 6.3 Tab		
10A 250Vac			
0717-2-P For applications (eg medical equipment) where both live & neutral feeds must be fused			

TYPE	TERMINAL
0721-P (2k min order)  Inlet	S Solder 
0722-C (2k min order)  Inlet	Q 4.8 Solder  W 6.3 Tab 
0723-C (2k min order)  Outlet	Q 4.8 Solder  W 6.3 Tab 

DIMENSIONS (mm)

View below is at Y















Technical data

Mouldings V2 (V0 option)
 Connectors Tin plated solid brass
 Terminals Silver plated

Terminal dimensions

For Connectors

For Switches

For Connectors									For Switches		
S	N	Q	W	P	L	LS	V12	V16	Slide T	Slide K	Rocker T
2.5mm Solder	4mm Solder	4.8mm Solder/ Fast on	6.3 Fast on	PCB	Solder	2.8mm Solder	12-14 AWG Solid Wire	16 AWG Solid Wire	Solder	2.8mm Solder	4.8mm Solder
											

Note: Designated solder terminals should not be fitted with "Push on", "QD" or "Fast on" type cable connectors