

Numeric digital display 6 digits

Part No. 500215



For displaying the measuring results with millimetre precision, directly connect the DLS or FLS measuring device to this numeric display via the sensor's RS-422 serial interface.


The display is delivered completely configured for the default setting of the DLS/FLS sensor.

For detailed information, please see our Application Note AN2001 «Numeric digital display» at our website.

Technical Data

Dimensions	Specification
	General: Power supply: 18...35 V DC Power consumption: approx. 2.5 VA (110mA@24V) Housing: Plastic, black Connection: Plug-in terminal strips Operating temperature: -20 ... 65°C Numeric display: 0 ... 9, various ASCII characters, height 14 mm Interface: RS-485 Baud Rate: 19200 / 7 /even Panel cut out: 92 x 45 mm
	Display: LED: red Front frame: 96 x 48 mm Weight: approx. 180 g Dimensions: see sketch Reading distance: 1 ... 5 m

Application example

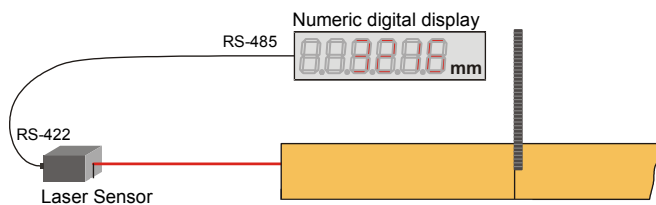

Order information

Part No.	Description
500215	Numeric digital display 6 digits Character height 14mm; LED red; RS-485; Reading distance: 1...5m applicable for DLS/FLS

